


Features

- S/PDIF Toslink audio switcher
- Three S/PDIF Toslink audio inputs
- S/PDIF audio supports 5.1ch (LPCM, AC3, DTS, bit depth up to 24 bits, sample rate up to 192KHz)

Package contents

- 3x1 S/PDIF Toslink Switch
- USB Type-A to Micro-B cable
- Quick start guide

Layout

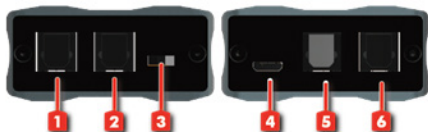

1. S/PDIF Toslink input#2
2. S/PDIF Toslink input#3
3. Slide switch for input selection
4. Power DC 5V
(connect to the available USB port via USB Type-A to Micro-B cable)
5. S/PDIF Toslink output
6. S/PDIF Toslink input#1



**3x1 S/PDIF
Toslink Switch**

Quick Start Guide

BLANK PAGE

