


Features

- Toslink-to-Coaxial or Coaxial-to-Toslink S/PDIF audio conversion
- Switchable between Coaxial and Toslink S/PDIF inputs
- S/PDIF audio supports 5.1ch (LPCM, AC3, DTS, bit depth up to 24 bits, sample rate up to 192KHz)

Package contents

- Toslink/Coaxial Bi-directional Audio Converter
- USB Type-A to Micro-B cable
- Quick start guide

Layout

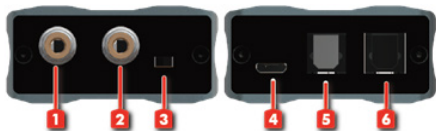

1. RCA input
2. RCA output
3. Slide Switch for input selection
4. Power DC 5V
(connect to the available USB port via USB Type-A to Micro-B cable)
5. Toslink output
6. Toslink input



**Toslink/Coaxial
Bi-directional
Audio Converter**

Quick Start Guide

BLANK PAGE

